

RAD WHEEL NUT & OTR MINING 15DX-NX

Part Number: **19339**




LIGHTER **FASTER** STRONGER

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting was designed with one job in mind: wheel nut bolting where torque control is a must.

SPECIFICATIONS

Torque Ranges: 300 ft. lbs. - 1500 ft. lbs.
Speed: 10 RPM
Weight: 8.6 lbs.
Square Drive: 1.0"
Noise Level: 80 dB
Repeatability: +/-2%
Accuracy: +/-4%

DIMENSIONS

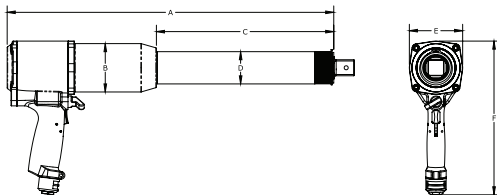

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D	DIMENSION E	DIMENSION F
20.2"	2.7"	9.77"	1.75"	2.75"	8.98"



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard
PN: 17375



Deep Socket
PN: 18480



Double Ended Arm
PN: 19094



Blank
PN: 17888



Double Ended Blank
PN: 19093



Retaining Ring
PN:



NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM