

# RAD WHEEL NUT & OTR MINING 10GX-NX

Part Number: **13691**




## LIGHTER **FASTER** STRONGER

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting was designed with one job in mind: wheel nut bolting where torque control is a must.

### SPECIFICATIONS

Torque Ranges: 200 ft. lbs. - 1000 ft. lbs.  
Speed: 20 RPM  
Weight: 8.0 lbs.  
Square Drive: 0.75"  
Noise Level: 80 dB  
Repeatability: +/-2%  
Accuracy: +/-4%

### DIMENSIONS

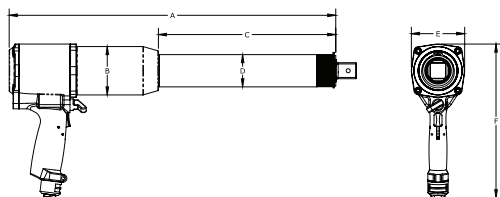

| DIMENSION<br>A | DIMENSION<br>B | DIMENSION<br>C | DIMENSION<br>D | DIMENSION<br>E | DIMENSION<br>F |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 20.4"          | 2.48"          | 9.55"          | 1.68"          | 2.75"          | 8.98"          |



Non  
Impacting



Safe &  
Reliable



Class 1 Division  
2 Group A, B,  
C, D T4



Accredited  
ISO/IEC 17025

### Included Tool Holder

With FRL unit, 12' hose and fittings



### SUITABLE REACTION ARMS

**Standard**  
PN: 19260



**Deep Socket**  
PN: 13367



**Double Ended Arm**  
PN: 13368



**Blank**  
PN: 13364



**Double Ended Blank**  
PN: 13365



**Retaining Ring**  
PN: 12733



## NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA  
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM