

B-RAD SELECT 5000

Imperial Part No. 28291

SPECIFICATIONS

Torque Range Ft. lbs: 1,000 - 5,000 Ft. lbs
Torque Range Nm: 1,350 - 7,000 Nm
Speed: 2.1 RPM
Weight: 8.8 kg (Including battery, excluding reaction arm & impact socket)
Square Drive: 1 1/2"
Noise Level: 90 dB
Accuracy: +/- 5%
Repeatability: +/-2%
Motor Type: Brushless
Metric Equivalent: Select 7000 Part No. 28272

INCLUDED

- B-RAD Select 5000 tool
- Reaction Arm (PN: 25286)
- Retaining Ring (PN: 21455)
- X 2 18V 5.2 Ah/93 Wh Li-ion battery
- Instruction Manual and Safety Guide
- Calibration Certificate
- Weatherproof storage case
- Tool Handle/Hanger (PN:26674)


SAFETY



- Double Safety Trigger Option (PN: 25949)



DIMENSIONS

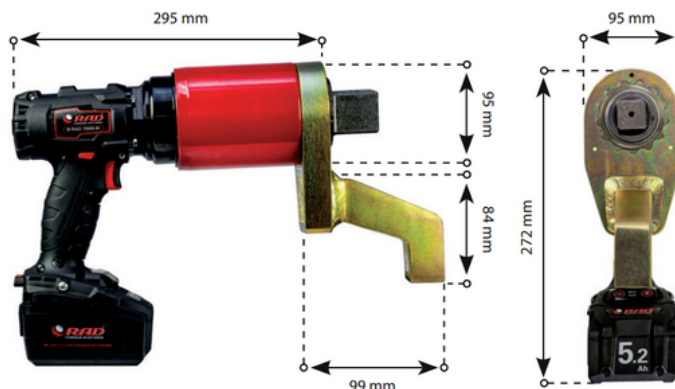

REACTION ARMS

ANGLED  PN: 25286 (included in kit)	ANGLED DEEP SOCKET  PN: 26118	90 DEGREE  PN: 29422	90 DEGREE DEEP SOCKET  PN: 29425
DOUBLE ENDED  PN: 26119	SLIDING ARM  PN: CRP20248-1	CAST ARM  PN: 25665	RETAINING RING  PN: 21455 (included in kit)

Adelaide (HQ)
 7 MAB Eastern Promenade
 Tonsley SA 5042
 (08) 8299 0355
 sa@radicaltorque.com.au

Perth
 1/184 Railway Parade
 Bassendean WA 6054
 (08) 6118 2710
 wa@radicaltorque.com.au

Brisbane
 25/121 Kerry Road
 Archerfield QLD 4108
 (07) 3063 9597
 qld@radicaltorque.com.au

Mackay
 10 Peace Street
 Paget, QLD 4740
 +61 418 950 527
 mackay@radicaltorque.com.au

Thailand
 171/5 Soi On-nuch66, Suan Luang
 Suan Luan, Bangkok 10250,
 Thailand
 +66 (0)2 130 5208
 thailand@radicaltorque.com